


Motorcycle Chain Standard & Heavy Duty

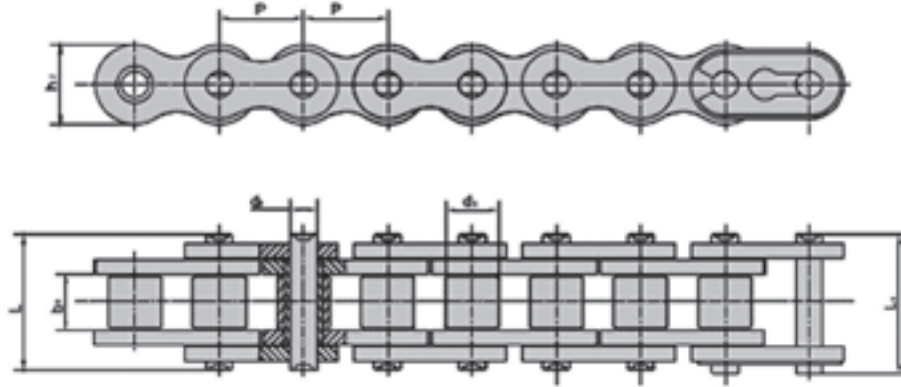

Chain No.	Pitch	Roller Diameter	Width between inner plates	Pin Diameter	Pin Length		Inner plate depth	Plate Thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	max	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
219H	7.774	4.59	5.0	3.01	12.00	12.00	7.6	1.0	6.6	7.9	0.27
415	12.70	7.75	5.10	3.96	12.50	13.80	10.40	1.5	11.60	12.50	0.46
415H	12.70	7.75	4.76	3.96	13.10	14.50	12.00	1.8	14.40	16.10	0.50
420	12.70	7.77	6.35	3.96	14.75	16.10	12.00	1.5	16.00	16.50	0.55
420H	12.70	7.77	6.35	3.96	16.00	17.40	12.00	1.8	17.00	17.50	0.69
428	12.70	8.51	7.75	4.45	16.70	18.05	12.00	1.5	17.80	18.50	0.70
428H	12.70	8.51	7.94	4.51	18.90	20.10	12.00	2.0	20.60	21.50	0.79
520	15.875	10.16	6.35	5.08	17.70	19.00	15.00	2.0	26.50	29.50	0.89
520H	15.875	10.16	6.35	5.24	19.15	20.50	15.00	2.4	30.00	31.00	0.96
525	15.875	10.16	7.96	5.08	19.40	20.90	15.00	2.0	26.50	29.00	0.93
525H	15.875	10.16	7.95	5.24	20.90	22.20	15.00	2.4	30.00	31.00	1.00
530	15.875	10.16	9.40	5.08	20.90	22.20	15.00	2.0	26.50	29.70	1.06
530H	15.875	10.16	9.40	5.24	22.50	24.20	15.00	2.4	30.00	31.50	1.15
630	19.05	11.91	9.40	5.94	22.70	24.00	18.00	2.4	35.00	37.00	1.50